

Signature LAMINATE



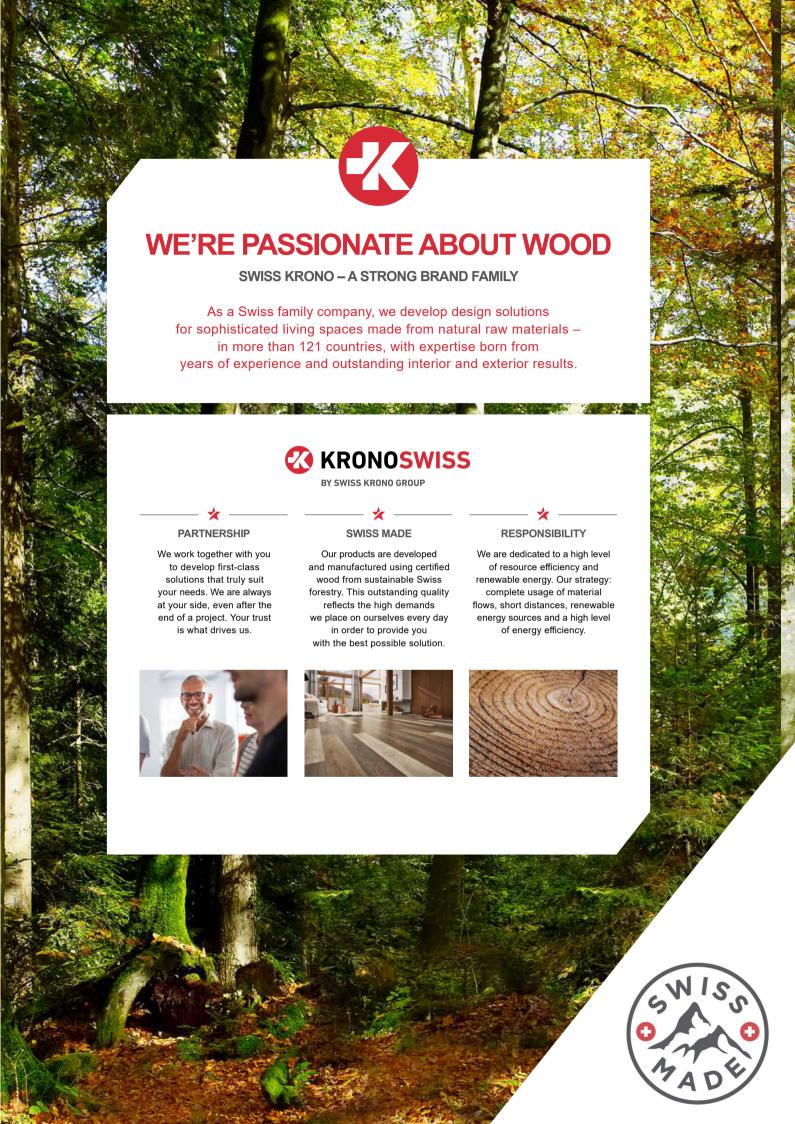

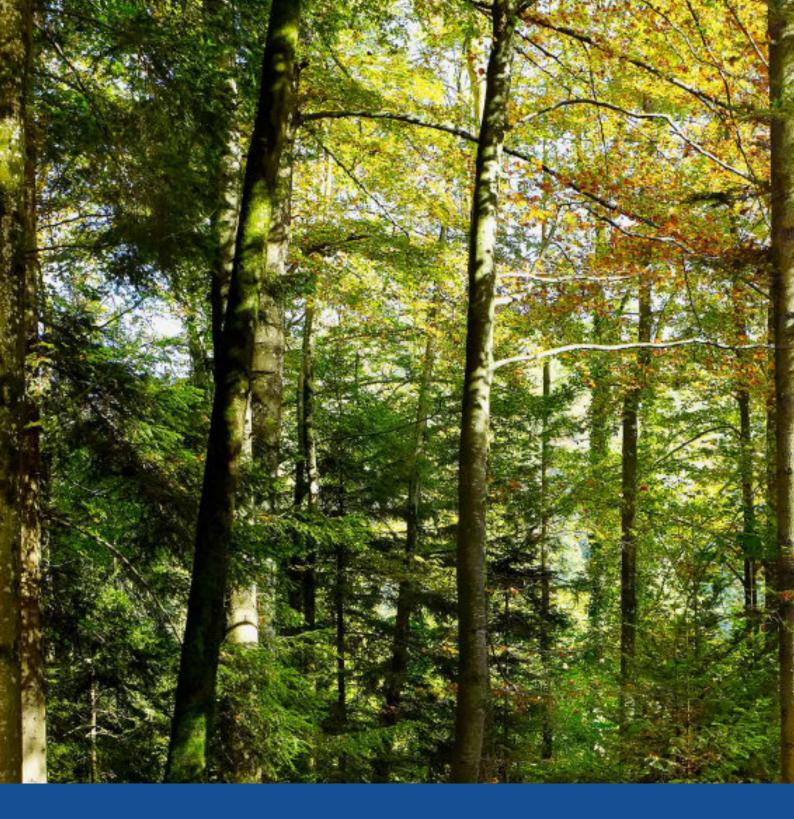

Collection Index

Liberty | 7

Origin | 13

Noblesse | 19

Swiss Herringbone | 25

Evolution | 9

Solid Chrome | 15

Noblesse Wide | 21

Authentic | 11

Solid | 17

Xpressions | 23







The advances in water resistant technology for laminate flooring have been huge. Aquastop ensures water resistance for up to 72 hours, meaning the scope for where you can now use laminate is wider than ever.






All of our Swiss collections are developed and manufactured using certified wood from sustainable forestry. We are also dedicated to maintaining a high level of efficiency and use of renewable energy throughout the manufacturing process.

LIBERTY





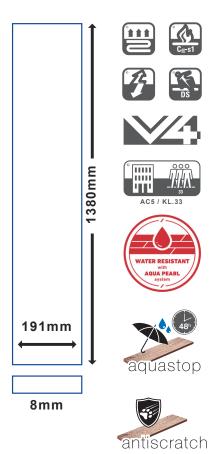














EVOLUTION

antiscratch










191mm

14mm







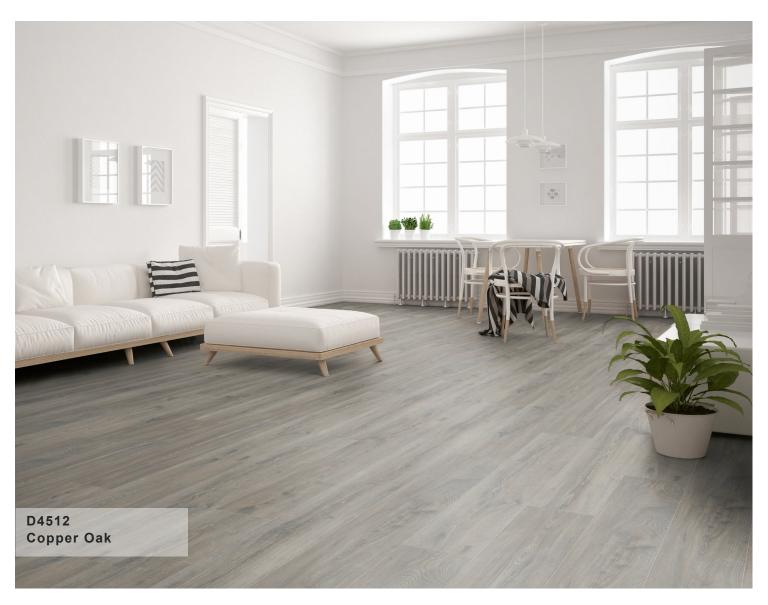








AUTHENTIC









14mm
















ORIGIN

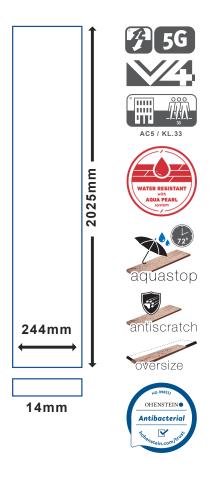


























SOLID CHROME

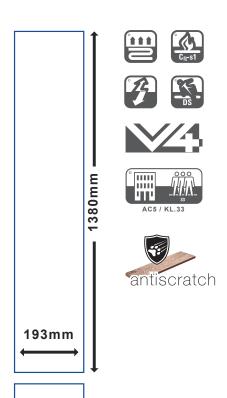

12mm


















SOLID

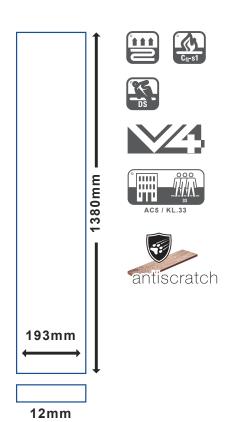




















NOBLESSE

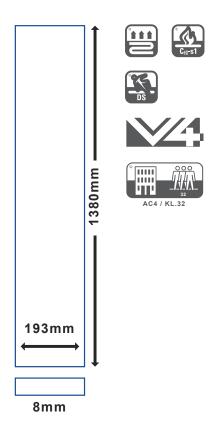





















NOBLESSE WIDE



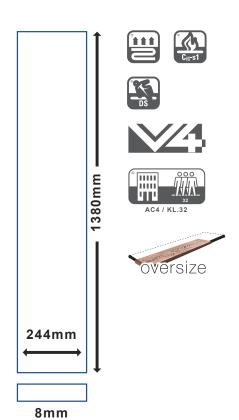






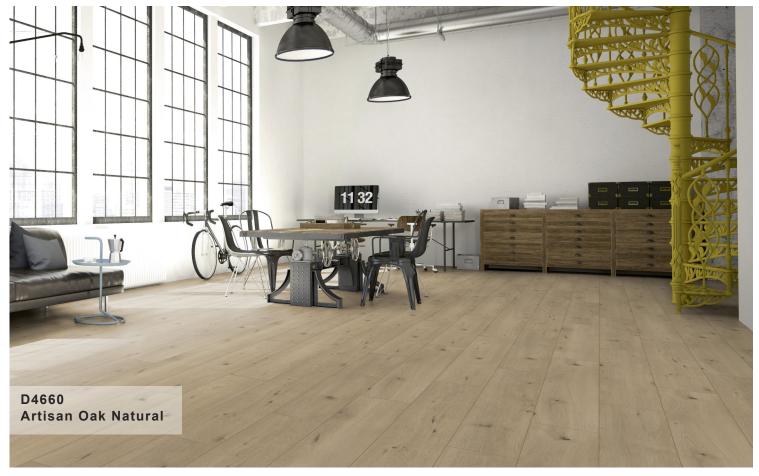



XPRESSIONS HERRINGBONE

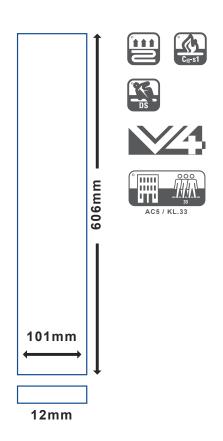
















SWISS HERRINGBONE



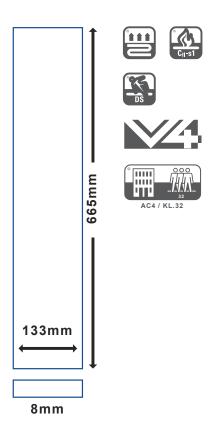









Commercial Projects

At Signature Floors we have decades of experience in working on large commercial and residential projects. Working closely with designers and architects on the island of Ireland, we provide a bespoke project planning service to ensure each project exceeds expectations. We regularly provide this service for the following environments:


- Hotels
- Retail
- Residential
- · Universities & Colleges
- Healthcare Facilities
- Restaurants

Recent commercial projects of note have included:

- University of Limerick Student Residences
- Cherrywood Apartment Development, Dublin
- Spencer North Apartment Development, Dublin
- · Frascati Residential Development, Dublin
- · Hansfield Housing Development, Dublin
- Concra Wood Golf Club House, Monaghan
- Stepaside Housing Development, Dublin
- · Coopers Cross Residential Development, Dublin
- Crows Nest Student Accommodation, Cork
- · Westmanstown Golf Club House, Dublin
- · Clay Farm Residential Development, Dublin





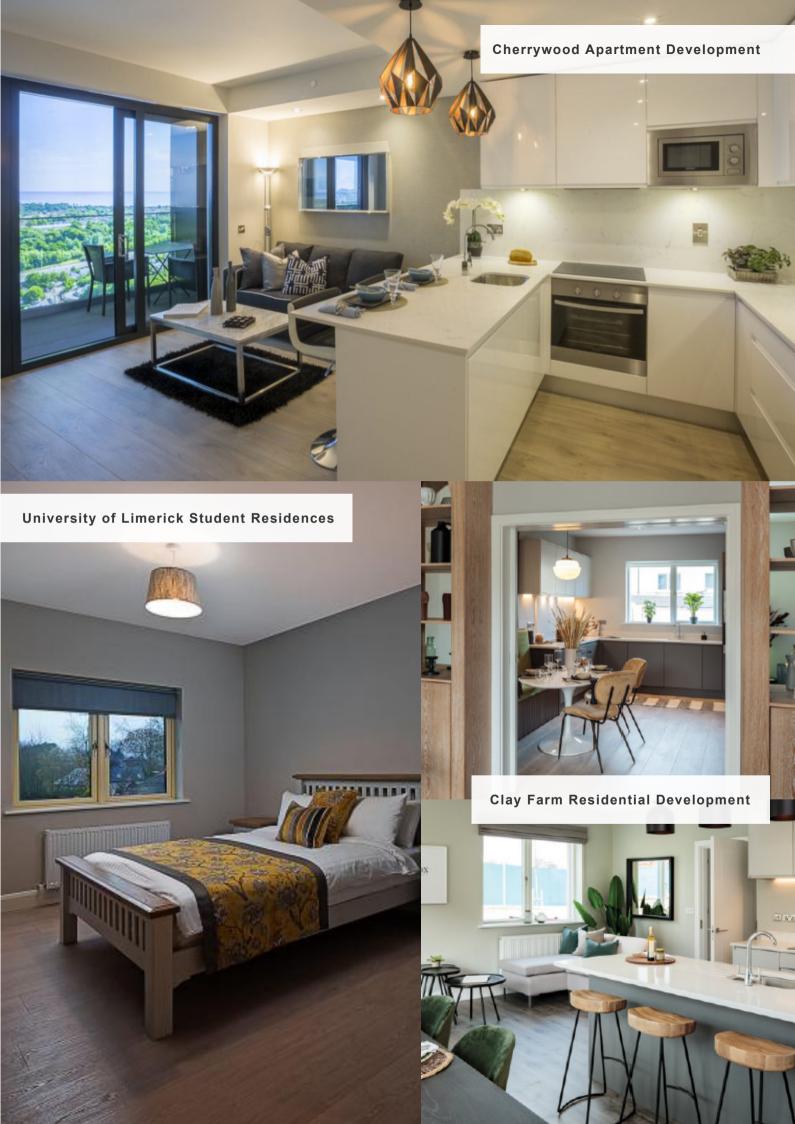

Specifications:

Laminate Floor Coverings According to EN 13329

	LIBERTY	EVOLUTION	AUTHENTIC	ORIGIN	SOLID CHROME	souid	NOBLESSE	NOBLESSE WIDE	XPRESSIONS HERRINGBONE	SWISS HERRINGBONE
Thickness (mm)	8	14	14	14	12	12	8	8	12	8
Width (mm)	193	191	224	244	193	193	193	244	101	133
Length (mm)	1380	1380	1845	2025	1380	1380	1380	1380	606	665
Level of use	33	33	33	33	33	33	32	32	33	32
Abrasion resistance	AC5	AC5	AC5	AC5	AC5	AC5	AC4	AC4	AC5	AC4
Thickness swelling (%)	<u><</u> 8	<u><</u> 10	<u><</u> 10	<u><</u> 8	<u><</u> 15	<u><</u> 15	<u><</u> 18	<u><</u> 18	<u><</u> 1	<u><</u> 12
Impact resistance small ball (N)	>15	>15	>15	>15	>15	>15	>12	>12	>8	>12
Impact resistance big ball (mm)	>1000	>1000	>1000	>1000	>1000	>1000	>750	>750	>1000	>750
Warranty domestic/commercial (years)	35 5	35 5	35 5	35 5	30 5	30 5	25 2	25 2	25 2	25 2
Micro-scratch resistance	MSR A2	MSR A3	MSR A3	MSR A3	MSR A2	MSR A2	MSR A3	MSR A3		
Surface soundness (N/mm2)	1.25	1.25	1.25	1.25	1.25	1.25	1.25	1.25		1.5
Electrostatic Propensity (kV)	<u><</u> 2	<u><</u> 2	<u><</u> 2	<u><</u> 2	<u><</u> 2	-	-	-		
Thermal Resistance (m2k/w)	0.059	0.1	0.1	0.1	0.089	0.089	0.059	0.059	0.099	0.059
Declaration of performance (KCH_LF_005)						✓	1	1		
(DOP), antistatic (KCH_LFa_005)	1	1	1	1	1					
Effect of furniture leg					No da	mage				
Castor chair test					No da	mage				
Resistance to staining	Groups 1 & 2: level 5 Group 3: level 4									
Light-fastness				Blue wo	ool scale 6	G Grey S	cale <u>></u> 4			
Reaction to fire					Cfl	-s1				
Slip resistance	DS									
VOC emission 28 days (ug/m3)	100									
Formaldahyde emission (ppm)	≤0.1 (E1)									
Raw HDF board (ppm)	≤0.11 (CARB P2/TSCA TITLE V1)									
Composition	Renewable energy >90% Wood fibres ~80% Swiss Wood UF-Resin ~15%									
Further information	No chlorides No Biocides Heavey-metal free coating Thermally recyclable									

All details were correct at the time this brochure was printed. For the most up-to-date datasheets, please contact us prior to ordering.

Laminate Underlays:

			ROO	MS								
Range Name	GB	МВ	L/D R	H,S & L	Comm Use	Density kg/m³	Roll Weight	Moisture Barrier	Thickness	Sound Performance Class	Tog	Impact Sound dB
Acoustica Platinum	1	1	1	1	1	707	38.4kg	✓	3.75mm	USR+	0.28	△ LW 23
Acoustica Gold Supreme	✓	1	1	1	1	350	10.5kg	1	3.00mm	USR+	0.70	△ LW 22
Acoustica Gold Excel	1	1	1	1	1	930	28.0kg	✓	3.50mm	USR+	0.28	△ LW 23
Acoustica Gold	1	1	1	1	1	735	21.4kg	✓	3.00mm	PSR+	0.25	△ LW 20
Acoustica Bronze	1	1	1	1	1	735	32.2kg		3.00mm	PSR+	0.22	△ LW 22
Acoustica Silver	1	1	1	1	1	925	18.5kg	1	2.00mm	ESR+	0.22	△ LW 22
Acoustica LVT 18dB	1	1	1	1	1	1666	25.0kg		1.50mm	ESR+	0.12	△ LW 18
Acoustica Fibreboard	1	1	1	1	1				5.00mm	GSR+	0.50	△ LW 22
Whisper Gold	1	1	1	1	1	30	1.78kg	√ +Overlap	5.00mm	PSR+	1.20	△ LW 21
Whisper Guard	1	1	1	1	✓	65	2.92kg	√ +Overlap	3.50mm	PSR+	0.88	△ LW 23
Whisper Silver	1	1	1	1	•	30	1.77kg	√ +Overlap	3.00mm	GSR+	0.87	△ LW 19
Whisper Green Barrier	1	1	1	✓	•	30	1.93kg	√ +Overlap	3.00mm	GSR+	0.72	△ LW 19
Whisper 3mm	1	1	✓	✓	•	20	0.90kg		3.00mm	BSR	0.70	△ LW 18
Whisper 2mm	✓	1	1	1	•	20	0.60kg		2.00mm	BSR	0.41	△ LW 18

✓ Recommended • Suitable for use in

GB General Bedroom MB Master Bedroom L/D R Lounge Dining Room H,S,L Hall Stairs Landing Comm Commercial Use

Acoustica Underlays

The Floorwise acoustica range of dense rubber underlays are excellent at absorbing noise, both between floors by way of impact sound reduction and within the room through airborne noise reduction.

Whisper Underlays

The range of Whisper PE foam underlays are also very good at absorbing impact noise but do not perform to the same standards as the acoustica range for airborne sound.


Suitability for Underfloor Heating

Floorwise underlays are suitable for use with most underfloor heating systems. The only real exception is a cable matting system, which was developed specifically for use with ceramic and stone floor tiles.



LET YOUR FLOOR BREATHE






3mm




ProVent flooring underlay is an approx. 3 mm thick foam panel made from closed-cell polyethylene. Each panel is coated with a 0.02 mm thick high density polyethylene foil for additional protection against water vapour. The material is particularly resistant to ageing.

ProVent reinforces the ventilation of the concrete under-floor with the help of the patented Micropumping™ (water vapour drainage) system. This ventilation ensures that the water vapour is extracted and the underlay remains dry. As a result, mould is prevented from forming under the flooring.



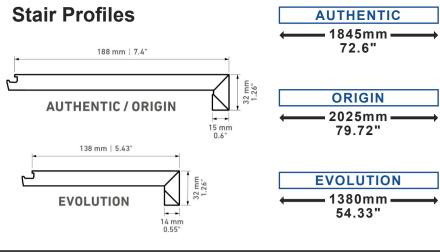

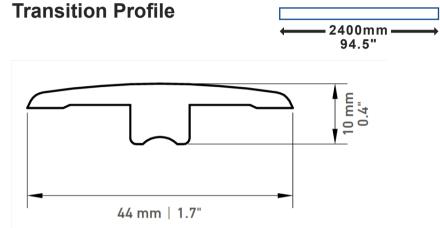

Wooden Skirting

Our skirting is 6" thick, comes in 3.05m lengths, and is availablie in three colours:

- White
- Natural Oak
- Silver Grey





Laminate Cleaner

Ensuring a floor is kept in good condition is important with any floorcovering and a laminate floor is no different. Regular cleaning is an essential part of any maintenance routine and helps to ensure the longevity of your laminate floor. The KronoSwiss floor cleaner is especially formulated for our laminate collections and works gently but thoroughly to help keep your floors in their best condition.

zerifiti profles

245 **Z Edge** Adjustable height up to 9mm

Cat. No: **245MG** Matt Gold **245MS** Matt Silver


This versatile section is used to join carpets with a variety of floor coverings. The top can be adjusted to accommodate surfaces of different heights up to 9mm.

Profile length 2.7m

245MG 245MS

Tube size: $15 \times 2.7 \text{m}$ lengths = **40.5**m

MG MS



277 Square Edge 8mm

Cat. No: **277MG** Matt Gold **277MS** Matt Silver

Ideal as a capping edge, a finish to open plan areas, or edging to access panels and ceramic floors. To accommodate flooring up to 8.5mm thickness.

Profile length 2.7m


277MG **/** 277MS **/**

Tube size: 10 x2.7m lengths = **27**m









287 Stick Down Edge 9mm

Cat. No: 287MGA Matt Gold 287MSA Matt Silver 287OAA Oak 287DKWA Dark Walnut 287GOA Grey Oak

A versatile section which can be used as a capping edge around the room. Also useful around fireplaces and as a finish to open plan areas or as an edge to matwells and access panels.















Tube Size: 10 x 2.7m lengths = **27**m



288 Stick Down Edge 15mm


Cat. No: **288MGA** Matt Gold **288MSA** Matt Silver

A versatile section which can be used as a capping edge around the room. Also useful around fireplaces and as a finish to open plan areas or as an edge to matwells and Access panels. Suitable for use with wood and thicker laminate floors with underlay.

Profile length 2.7m

Tube Size: 10 x 2.7m lengths = **27**m

288MSA



289 Stick Down Sloping Edge 8mm

Cat. No: **289MGA** Matt Gold **289MSA** Matt Silver

The Sloping Edge is a transitional profile and protects the edges of floor coverings up to a height of 8mm. With a diminishing sloping edge, the profile provides a ramp down to the adjacent floor covering.

Profile length 2.7m

289MGA •

289MSA 🗸

Tube Size: 10 x 2.7m lengths = **27**m









230 Stick Down Sloping Edge 14mm

Cat. No: **290MGA** Matt Gold **290MSA** Matt Silver

As **289**, but for use with 14mm wood or laminate on underlay.

Profile length 2.7m

290MGA 0


-

Tube Size: 10 x 2.7m lengths = **27**m









zerifici profles

291 Stick Down Cover Strip 38mm


MGA MSA OAA DKWA GOA

Cat. No: 291MGA Matt Gold 291MSA Matt Silver 291OAA Oak 291DKWA Dark Walnut 291GOA Grey Oak

The versatile cover strip can be used to conceal and protect joins and expansion gaps between all types of wood, laminate and resilient floor coverings.

Profile	length 2.7m
291MGA 291MSA 291OAA 291DKWA 291GOA))))
Tube Size:	10 x

2.7m lengths = 27m



292 Stick Down Sloping Edge 22mm

MSA 🍪

Cat. No: **292MSA** Matt Silver

The Sloping Edge is a transitional profile for use with wood flooring or on engineered wood with underlay. With a diminishing sloping edge, the profile provides a ramp down to the adjacent floor covering.

Profile length 2.7m

292MSA

Tube Size: 10 x

2.7m lengths = **27**m





16.5mm

16.5mm

foil wrapped MDF


Floorwise has developed a quality range of scotia in a wide variety of decors to ensure a professional finish to each and every installation

F541 Scotia

- Used to cover the expansion gap on wood and laminate floors
- Wood foiled
- 16.5mm x 16.5mm x 2.4m

Also available from Signature Floors



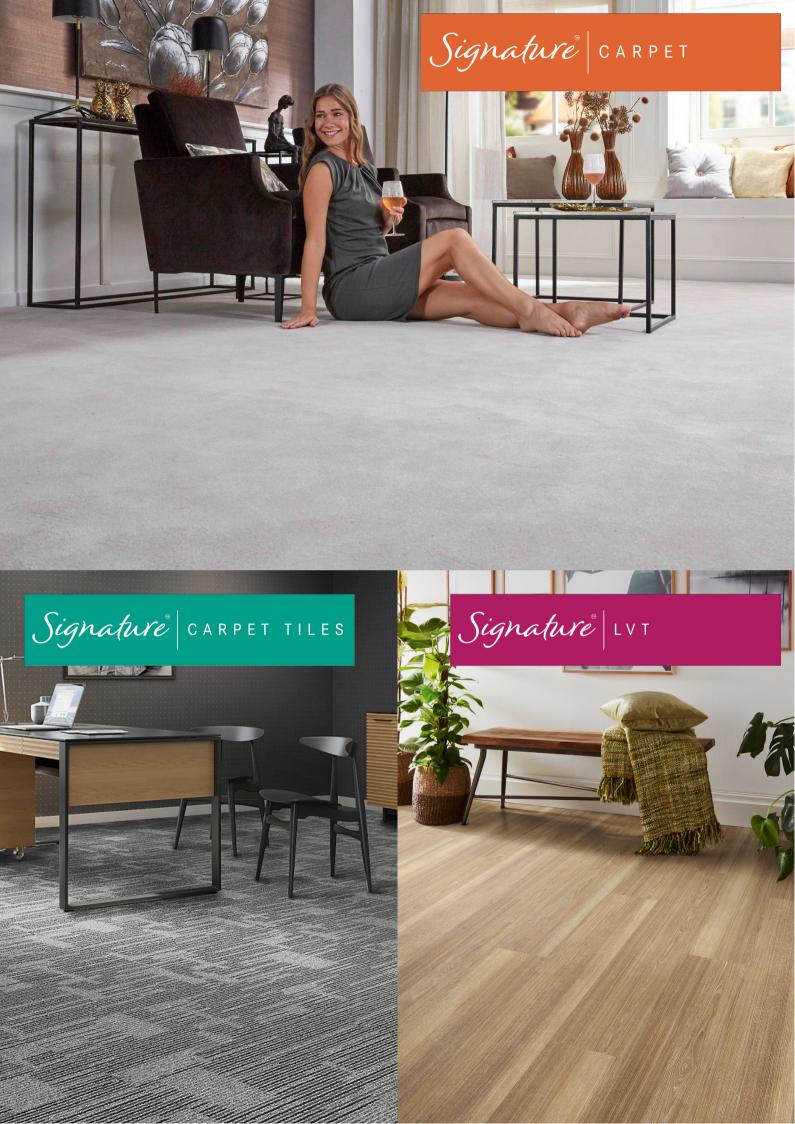

Signature LAMINATE

www.signaturefloors.ie

2021/22